Mirror TV Production Information

The Mues-Tec TV offers a plug & play solution to install behind a glass or mirror. You receive

- Low voltage TV unit
- Installation Frame already attached to TV Unit
- IR sensor already attached to TV Unit
- External power supply
- 2 waterproof remote controls, one to control your TV Unit and a universal one for up to 4 devices

Step 1 • Prepare your glass to allow the screen and the IR sensor to be visible. Ensure glass and TV Unit are free of particles and dust.

Step 2 • Attach TV frame to glass with silicone suited for attaching metal to glass.


OPTIONAL: remove TV Frame from TV Unit by removing the screws on each side. Attach TV Frame to glass, allow to dry minimum 24 hours. Screw TV Unit into the TV Frame.

Position the IR Sensor on the glass and glue with silicone to secure in place.

Allow to dry minimum 24 hours.

Step 3 • Attach desired mounting bars to the mirror.

Step 4 • Connect power supply and inputs/outputs.

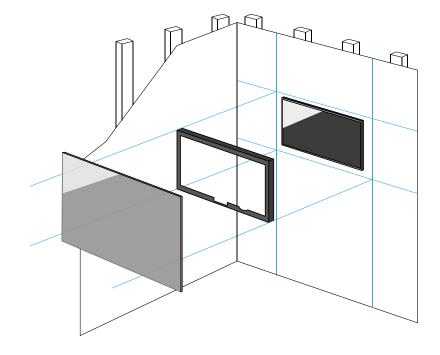

You may recess mount the TV inside the wall. You may also purchase the Mues-Tec Wall Box to secure tightly inside the wall.

ATTENTION: Use experienced professional for this installation. The weight of the TV must be supported by the right amount of silicone and if deemed required by a supporting bar. The TV can only support the weight of a near same size glass. The bigger glass must carry the weight of the TV Unit.



Headquarter - Germany

info@mues-tec.de

info@mues-tec.de

www.mues-tec.de

Ollowater 16 26127 Granneline

Branch - Switzerland

⊠ info@mues-tec.ch

www.mues-tec.ch

Bierigutstr. 1, 3608 Thur

Showroom - Germany

☑ info@mues-tec.c

www.mues-tec.de

DE60314 Frankfurt a.

MENA

⊠ mena.sales@mues-tec.com

